

MM54HC113/MM74HC113 Dual J-K Flip-Flops with Preset

General Description

These high speed J-K Flip-Flops utilize advanced silicon-gate CMOS technology to achieve the high noise immunity and low power dissipation of standard CMOS integrated circuits. These devices can drive 10 LS-TTL loads.

These flip-flops are edge sensitive to the clock input and change state on the negative going transition of the clock pulse. Each one has independent J, K, CLOCK, and PRESET inputs and Q and \bar{Q} outputs. PRESET is independent of the clock and accomplished by a low level on the input.


The 54HC/74HC logic family is functionally as well as pin-

compatible with the standard 54LS/74LS logic family. All inputs are protected from damage due to static discharge by internal diode clamps to V_{CC} and ground.

Features

- Typical propagation delay: 16 ns
- Wide operating voltage range: 2–6V
- Low input current: 1 μ A maximum
- Low quiescent current: 40 μ A (74HC Series)
- High output drive: 10 LS-TTL loads


Connection Diagram and Truth Table

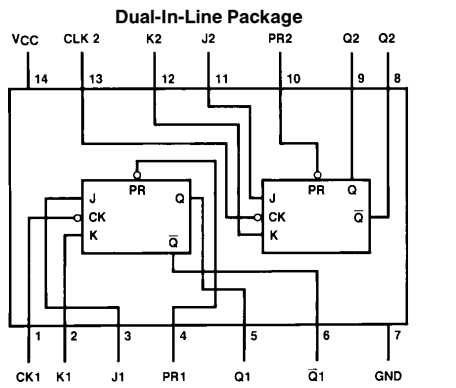

| Inputs | | | | Outputs | |
|--------|--------------|---|---|---------|------------|
| PR | CLK | J | K | Q | \bar{Q} |
| L | X | X | X | H | L |
| H | \downarrow | L | L | Q0 | $\bar{Q}0$ |
| H | \downarrow | H | L | H | L |
| H | \downarrow | L | H | L | H |
| H | \downarrow | H | H | TOGGLE | |
| H | H | X | X | Q0 | $\bar{Q}0$ |

Order Number MM54HC113 or MM74HC113

Logic Diagram

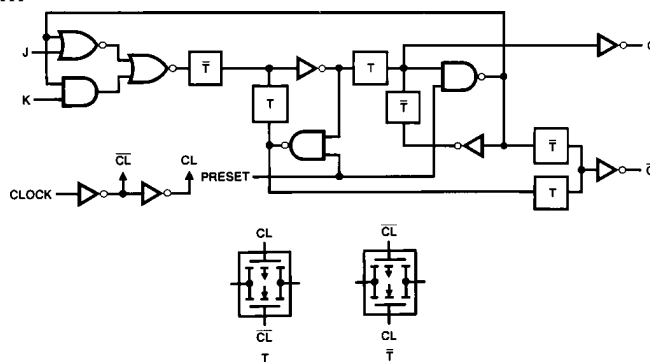

Absolute Maximum Ratings (Notes 1 & 2)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

| | |
|--------------------------------------------------|-------------------------|
| Supply Voltage (V_{CC}) | -0.5 to +7.0V |
| DC Input Voltage (V_{IN}) | -1.5 to $V_{CC} + 1.5V$ |
| DC Output Voltage (V_{OUT}) | -0.5 to $V_{CC} + 0.5V$ |
| Clamp Diode Current (I_{IK}, I_{OK}) | ± 20 mA |
| DC Output Current, per pin (I_{OUT}) | ± 25 mA |
| DC V_{CC} or GND Current, per pin (I_{CC}) | ± 50 mA |
| Storage Temperature Range (T_{STG}) | -65°C to +150°C |
| Power Dissipation (P_D) (Note 3) | 600 mW |
| S.O. Package only | 500 mW |
| Lead Temp. (T_L) (Soldering 10 seconds) | 260°C |

Operating Conditions

| | Min | Max | Units |
|--------------------------------------------------|-----|----------|-------|
| Supply Voltage (V_{CC}) | 2 | 6 | V |
| DC Input or Output Voltage (V_{IN}, V_{OUT}) | 0 | V_{CC} | V |
| Operating Temp. Range (T_A) | | | |
| MM74HC | -40 | +85 | °C |
| MM54HC | -55 | +125 | °C |
| Input Rise or Fall Times (t_r, t_f) | | | |
| $V_{CC} = 2.0V$ | | 1000 | ns |
| $V_{CC} = 4.5V$ | | 500 | ns |
| $V_{CC} = 6.0V$ | | 400 | ns |

DC Electrical Characteristics (Note 4)

| Symbol | Parameter | Conditions | V_{CC} | $T_A = 25^\circ C$ | | 74HC $T_A = -40$ to $85^\circ C$ | | 54HC $T_A = -55$ to $125^\circ C$ | | Units |
|----------|-----------------------------------|-------------------------------------------------------------------------------------|----------|--------------------|-------------------|-------------------------------------|-----------|--------------------------------------|---|-------|
| | | | | Typ | Guaranteed Limits | | | | | |
| V_{IH} | Minimum High Level Input Voltage | | 2.0V | | 1.5 | 1.5 | 1.5 | | V | |
| | | | 4.5V | | 3.15 | 3.15 | 3.15 | V | | |
| | | | 6.0V | | 4.2 | 4.2 | 4.2 | V | | |
| V_{IL} | Maximum Low Level Input Voltage** | | 2.0V | | 0.5 | 0.5 | 0.5 | V | | |
| | | | 4.5V | | 1.35 | 1.35 | 1.35 | V | | |
| | | | 6.0V | | 1.8 | 1.8 | 1.8 | V | | |
| V_{OH} | Minimum High Level Output Voltage | $V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 20 \mu A$ | 2.0V | 2.0 | 1.9 | 1.9 | 1.9 | V | | |
| | | | 4.5V | 4.5 | 4.4 | 4.4 | 4.4 | V | | |
| | | | 6.0V | 6.0 | 5.9 | 5.9 | 5.9 | V | | |
| | | $V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 4.0$ mA $ I_{OUT} \leq 5.2$ mA | 4.5V | 4.2 | 3.98 | 3.84 | 3.7 | V | | |
| | | | 6.0V | 5.7 | 5.48 | 5.34 | 5.2 | V | | |
| | | | | | | | | | | |
| V_{OL} | Maximum Low Level Output Voltage | $V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 20 \mu A$ | 2.0V | 0 | 0.1 | 0.1 | 0.1 | V | | |
| | | | 4.5V | 0 | 0.1 | 0.1 | 0.1 | V | | |
| | | | 6.0V | 0 | 0.1 | 0.1 | 0.1 | V | | |
| | | $V_{IN} = V_{IH}$ or V_{IL} $ I_{OUT} \leq 4.0$ mA $ I_{OUT} \leq 5.2$ mA | 4.5V | 0.2 | 0.26 | 0.33 | 0.4 | V | | |
| | | | 6.0V | 0.2 | 0.26 | 0.33 | 0.4 | V | | |
| | | | | | | | | | | |
| I_{IN} | Maximum Input Current | $V_{IN} = V_{CC}$ or GND | 6.0V | | ± 0.1 | ± 1.0 | ± 1.0 | μA | | |
| I_{CC} | Maximum Quiescent Supply Current | $V_{IN} = V_{CC}$ or GND $I_{OUT} = 0 \mu A$ | 6.0V | | 4.0 | 40 | 80 | μA | | |

Note 1: Absolute Maximum Ratings are those values beyond which damage to the device may occur.

Note 2: Unless otherwise specified all voltages are referenced to ground.

Note 3: Power Dissipation temperature derating — plastic "N" package: -12 mW/°C from 65°C to 85°C; ceramic "J" package: -12 mW/°C from 100°C to 125°C.

Note 4: For a power supply of $5V \pm 10\%$ the worst case output voltages (V_{OH} and V_{OL}) occur for HC at 4.5V. Thus the 4.5V values should be used when designing with this supply. Worst case V_{IH} and V_{IL} occur at $V_{CC} = 5.5V$ and 4.5V respectively. (The V_{IH} value at 5.5V is 3.85V.) The worst case leakage current (I_{IN} , I_{CC} , and I_{OZ}) occur for CMOS at the higher voltage and so the 6.0V values should be used.

** V_{IL} limits are currently tested at 20% of V_{CC} . The above V_{IL} specification (30% of V_{CC}) will be implemented no later than Q1, CY'89.

AC Electrical Characteristics $V_{CC} = 5V$, $T_A = 25^\circ C$, $C_L = 15\text{ pF}$, $t_r = t_f = 6\text{ ns}$

| Symbol | Parameter | Conditions | Typ | Guaranteed Limit | Units |
|-----------------------|-----------------------------------------------------|------------|-----|------------------|-------|
| f_{MAX} | Maximum Operating Frequency | | 50 | 30 | MHz |
| t_{PHL} , t_{PLH} | Maximum Propagation Delay, Clock to Q or \bar{Q} | | 16 | 21 | ns |
| t_{PHL} , t_{PLH} | Maximum Propagation Delay, Preset to Q or \bar{Q} | | 23 | 28 | ns |
| t_{REM} | Minimum Removal Time, Preset to Clock | | 10 | 20 | ns |
| t_s | Minimum Setup Time, J or K to Clock | | 14 | 20 | ns |
| t_H | Minimum Hold Time, J or K from Clock | | -3 | 0 | ns |
| t_W | Minimum Pulse Width, Preset, Clear or Clock | | 10 | 16 | ns |


AC Electrical Characteristics $C_L = 50\text{ pF}$, $t_r = t_f = 6\text{ ns}$ (unless otherwise specified)

| Symbol | Parameter | Conditions | V_{CC} | $T_A = 25^\circ C$ | | 74HC | 54HC | Units |
|-----------------------|-----------------------------------------------------|-----------------|----------|--------------------|-------------------|----------------------------------|-----------------------------------|-------|
| | | | | | | $T_A = -40\text{ to }85^\circ C$ | $T_A = -55\text{ to }125^\circ C$ | |
| | | | | Typ | Guaranteed Limits | | | |
| f_{MAX} | Maximum Operating Frequency | | 2.0V | 9 | 5 | 4 | 3 | MHz |
| | | | 4.5V | 45 | 27 | 21 | 18 | MHz |
| | | | 6.0V | 53 | 31 | 24 | 20 | MHz |
| t_{PHL} , t_{PLH} | Maximum Propagation Delay, Clock to Q or \bar{Q} | | 2.0V | 100 | 125 | 160 | 183 | ns |
| | | | 4.5V | 20 | 25 | 32 | 37 | ns |
| | | | 6.0V | 17 | 33 | 27 | 32 | ns |
| t_{PHL} , t_{PLH} | Maximum Propagation Delay, Preset to Q or \bar{Q} | | 2.0V | 137 | 165 | 206 | 239 | ns |
| | | | 4.5V | 27 | 33 | 41 | 47 | ns |
| | | | 6.0V | 23 | 28 | 35 | 40 | ns |
| t_{REM} | Minimum Removal Time, Preset to Clock | | 2.0V | 55 | 100 | 125 | 150 | ns |
| | | | 4.5V | 11 | 20 | 25 | 30 | ns |
| | | | 6.0V | 9 | 17 | 21 | 25 | ns |
| t_s | Minimum Setup Time, J or K to Clock | | 2.0V | 77 | 100 | 125 | 150 | ns |
| | | | 4.5V | 15 | 20 | 25 | 30 | ns |
| | | | 6.0V | 13 | 17 | 21 | 25 | ns |
| t_H | Minimum Hold Time, J or K from Clock | | 2.0V | -3 | 0 | 0 | 0 | ns |
| | | | 4.5V | -3 | 0 | 0 | 0 | ns |
| | | | 6.0V | -3 | 0 | 0 | 0 | ns |
| t_W | Minimum Pulse Width, Preset, Clear or Clock | | 2.0V | 55 | 80 | 100 | 120 | ns |
| | | | 4.5V | 11 | 16 | 20 | 24 | ns |
| | | | 6.0V | 9 | 14 | 18 | 20 | ns |
| t_{TLH} , t_{THL} | Maximum Output Rise and Fall Time | | 2.0V | 30 | 75 | 95 | 110 | ns |
| | | | 4.5V | 8 | 15 | 19 | 22 | ns |
| | | | 6.0V | 7 | 13 | 16 | 19 | ns |
| t_r , t_f | Maximum Input Rise and Fall Time | | 2.0V | | 1000 | 1000 | 1000 | ns |
| | | | 4.5V | | 500 | 500 | 500 | ns |
| | | | 6.0V | | 400 | 400 | 400 | ns |
| C_{PD} | Power Dissipation Capacitance (Note 5) | (per flip-flop) | | 80 | | | | pF |
| C_{IN} | Maximum Input Capacitance | | | 5 | 10 | 10 | 10 | pF |

Note 5: C_{PD} determines the no load dynamic power consumption, $P_D = C_{PD} V_{CC}^2 f + I_{CC} V_{CC}$, and the no load dynamic current consumption, $I_S = C_{PD} V_{CC} f + I_{CC}$.


Typical Applications

N Bit Presettable Binary Ripple Counter with Enable

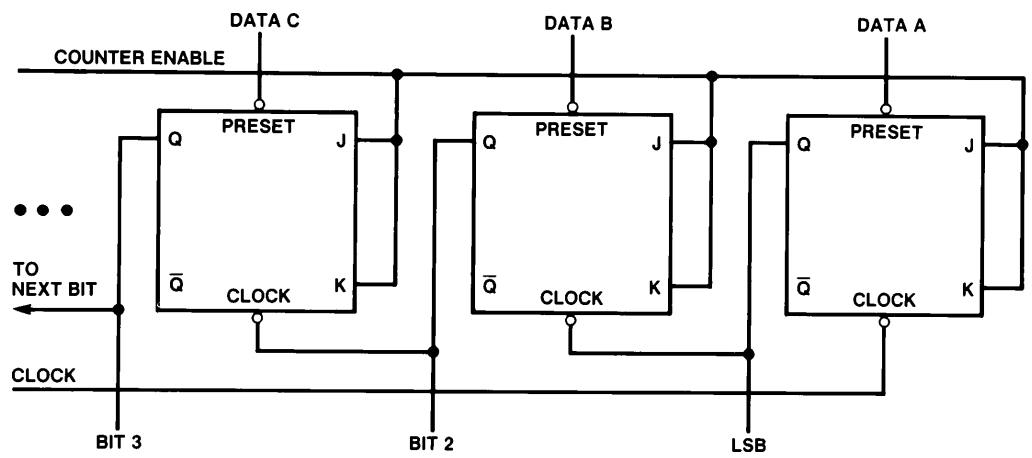


TL/F/5073-3

N Bit Parallel Load/Serail Load Shift Register

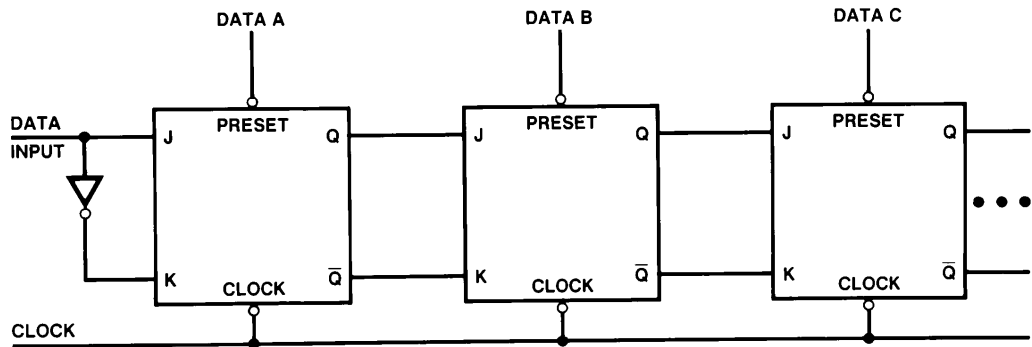

TL/F/5073-4


Physical Dimensions inches (millimeters)

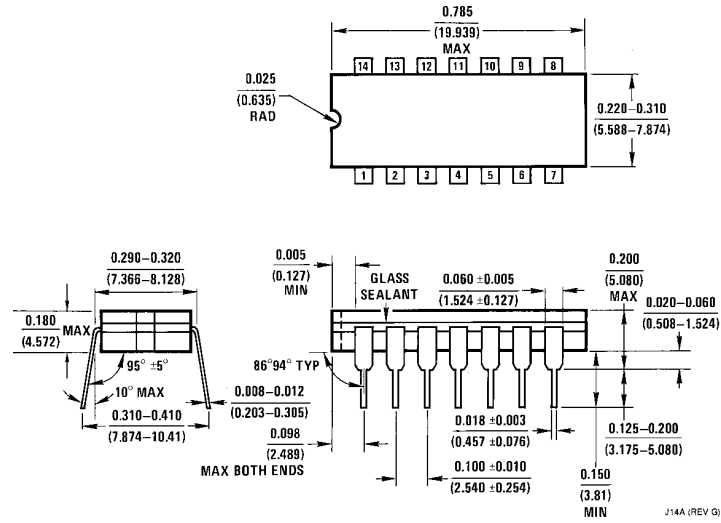

**Order Number MM54HC113J or MM74HC113J
NS Package J14A**

J14A (REV G)

Physical Dimensions inches (millimeters) (Continued)

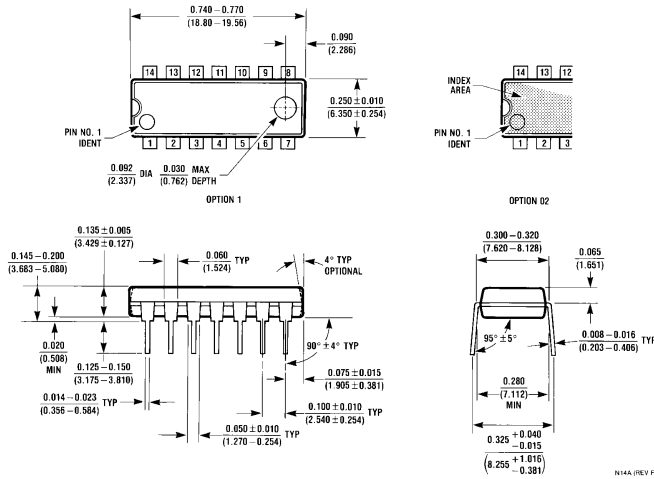

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
19th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.